


performance

HL-1440

In today's fast moving business environment the ability to print to a professional finish quickly and efficiently is essential. With a high quality 1200 x 600 dpi resolution combined with a print speed of 14 pages per minute, the Brother HL-1440 mono printer meets and indeed exceeds this challenge comfortably.

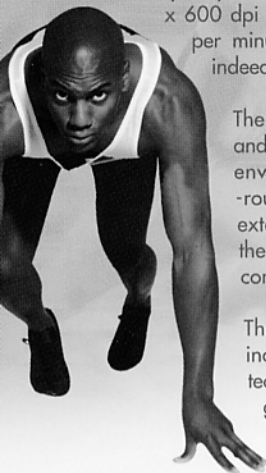

The standard memory of 2MB expandable up to 34MB and compatibility with an impressive range of computing environments, including Apple Mac, ensures an all-round quality performance. Combine all these with the extensive range of user-friendly features included on the HL-1440, and it's easy to see how this printer consistently out-performs its competitors.

The HL-1440 printer is quick and easy to install and includes the benefit of comprehensive, state-of-the-art technical support with Windows interactive Animations, giving a step by step guide to your new printer. Plus, for additional peace of mind, you can enjoy direct access to the Brother Solutions Centre web site.

- Up to 14 pages per minute print speed
- High Quality Laser Printer
- Up to 1200 x 600 dpi resolution
- 2MB standard memory, expandable up to 34MB
- Parallel and USB ports as standard
- Wide compatibility

Optimised drivers for Window[®] 95/98/ME/NT[®] 4 & Windows 2000

Driver for Mac OS 8.51 or later

DOS compatibility

- 250 sheet universal paper cassette
- Manual paper feed slot
- Dedicated support page on <http://solutions.brother.com>
- Automatic e-mail print software
- Optional 10BaseT Ethernet connectivity
- Easy replacement, long life consumables



Network card



Toner & Drum

Model HL-1440

ENGINE

Technology		Electrophotographic
Print Speed		Up to 14 ppm
First Print Time		Less than 15 sec ^{*1}
Resolution	Windows 95/98/ME/NT4 and Windows 2000	1200 x 600 dpi for graphics 600 dpi 300 dpi
	DOS	300 dpi
	Mac OS	1200 x 600 dpi for graphics 600 dpi 300 dpi

CONTROLLER

Processor		Fujitsu MB86833 66MHz
Memory	Standard Option	2MB 1 SIMM slot; expandable up to 34MB
Interface	Standard Option	IEEE 1284 Parallel, USB 10BaseT (NC-2010P), IrDA (IR-1000)
Network Connectivity	Interface Protocol	Optional 10BaseT (NC-2010P) TCP/IP, IPX/SPX, NetBEUI, DLC/LLC, DEC LAT, Banyan VINES
Emulation		PCL4
Resident Fonts	PCL	24 Bitmap fonts

SOFTWARE

Printer Driver		PCL Driver for Windows 95/98/ME/NT4, Windows 2000, and Mac OS 8.51 - 9.1 ^{*2}
Utilities		Automatic E-mail Printing ^{*3} Interactive Help ^{*4} Status Monitor Driver Deployment Wizard ^{*5}

CONTROL PANEL

Display	4 LEDs
Switch	1 Key

PAPER HANDLING

Paper Input ^{*6}	Paper Cassette (Standard)	250 Sheets
	Manual Feed	1 Sheet
Paper Output ^{*6}	Face Down	150 Sheets
	Face Up	1 Sheet

MEDIA SPECIFICATIONS

Media Types	Manual Feed	Plain Paper, Bond Paper, Recycled Paper, Envelopes, Labels and Transparencies
	Paper Cassette (Standard)	Plain Paper, Bond Paper, Recycled Paper and Transparencies ^{*7}
Media Weights	Manual Feed	60 - 161 g/m ²
	Paper Cassette	60 - 105 g/m ²
Media Sizes	Manual Feed	Custom: 69.8 x 116 - 216 x 356 mm
	Paper Cassette (Standard)	A4, Letter, B5(ISO), B5(JIS), A5, B6(ISO), A6, Exe

PRINTER DRIVER FUNCTIONS^{*8}

Page Layout	N in 1 Printing Poster Printing Watermark Printing	2, 4, 9, 16, 25 in 1 page 1 in 4, 9, 16, 25 Yes
Others		Quick Print Setup ^{*9} Manual Duplex

SUPPLIES

Toner	Standard Cartridge High Yield Cartridge	Up to 3,000 pages A4/LTR pages @ 5% coverage Up to 6,000 pages A4/LTR pages @ 5% coverage Up to 20,000 A4/LTR pages (1 page job)
Drum		

DIMENSIONS/ WEIGHTS

Dimensions	360 x 370 x 235 mm (WxDxH)
Weights	Approx. 9.2kg including the drum unit and toner cartridge

OTHERS

Power Consumption	Printing Standby Sleep	Less than 340W Less than 70W Less than 6W
Noise Level	Printing Standby	50 dB (A) Silent or 27dB (A)
Ecology	Power Saving Toner Saving	Yes Yes

*1 From Standard Paper Cassette

*2 Mac OS 8.51 - 9.1 and USB cable required

*3 Utility software that automatically prints e-mail messages (For Windows 95/98/ME)

*4 Instructional movie for the solution when any error message appears on the Status Monitor

*5 The Driver Deployment Wizard guides you through the steps of installing a Brother printer on a locally connected or networked Windows PC

*6 Calculated with 80 g/m² paper

*7 Up to 10 sheets

*8 Some functions are not available on PS2 and Mac Drivers

*9 A function that enables you to change the printer driver settings without opening the Properties dialog box.